

TOC PROBE

OA SERIES



FEATURES & BENEFITS

- Affordable real-time TOC organics monitoring
- Multiple wavelength sensor uses patent-pending technology for superior measurement performance
- Robust submersible probe with titanium or stainless steel housing
- Operator friendly, low maintenance UV LED design
- Reagent free optical measurements
- Simple to install and operate

MUNICIPAL DRINKING WATER
MUNICIPAL WASTEWATER
INDUSTRIAL PROCESS WATER
INDUSTRIAL WASTEWATER

WATER QUALITY
MONITORING
SOLUTIONS

REAL-TIME MONITORING SOLUTION

TOC Probe

Real Tech's robust TOC submersible probe provides affordable real-time measurement of total organic carbon (TOC) and/or dissolved organic carbon (DOC) in water or wastewater. The probe's rugged body is built to withstand harsh environments, with titanium or stainless steel options. Designed to meet the needs of many monitoring applications, the OA series offers multiple path length selections for the desired measurement range.

Controllers and Accessories

Our innovative modular product platform ensures our clients gain the real-time water quality monitoring system that meets their specific demands and budget. With multiple controller and accessory options available such as automatic compressed air cleaning systems that lower maintenance while improving system performance, Real Tech provides a total solution for all of your unique water quality needs.

Liquid Ai® Compatible

Our Liquid Ai® data services complement our real-time water quality monitoring systems. Calibration Health Monitoring ensures accuracy and reliability are maintained so our clients can have the utmost confidence in their results, while our Remote Monitoring platform enables access to data anywhere, anytime.

MEASUREMENT PRINCIPLE

Real Tech's TOC probe utilizes patent-pending technology to provide superior measurement performance across multiple wavelengths of light using UV LEDs. Many compounds absorb light in the UV-VIS spectrum including organic compounds. The sensor measures organics in a multi-dimensional way that results in improved correlations to aggregate organic water quality parameters, such as TOC and DOC. This allows the sensor to be able to detect changes in the composition of organics independently of their concentration. Real Tech's innovative TOC probe is advancing water and wastewater management.

REALTECH
INC.



TOC PROBE SPECIFICATIONS

CHARACTERISTIC	TECHNICAL DATA	
	OA-X	OA-S
Model	OA-X	OA-S
Path Length	0.5, 1, 2, 4, 10 mm	
Parameters	TOC, DOC	
Range	Depends on model selected. Refer to range chart.	
Units	mg/L	
Sampling Time	10 seconds	
Calibration	Factory calibrated. Field adjustment of calibration is possible.	
Cleaning	Automatic compressed air or pressurized water cleaning with optional Probe Clean System	
Self-Diagnostics	Detection and diagnosis of internal system fault	
Alarms	Continuous detection of leaks, lamp output, humidity, temperature and electrical fault	
Humidity Control	Humidity sensor with desiccant pack	
Wavelengths	Multiple wavelengths	
Light Source	UV LED	
Electrical/Comm.	From controller	
Pressure Rating	15 PSI	
Operating Temp.	0 to 45°C (32 to 113°F)	
Housing Material	Titanium (Grade 2)	Stainless steel (SS 316)
Wetted Materials	Titanium, Epoxy, Sapphire, SS 316, Viton	Epoxy, Sapphire, SS 316, Viton
Weight	1.5kg (3.31lb)**	2.5kg (5.25lb)**
Ingress Protection Type	IPX8	
Dimensions	15" H x 2.0" Diameter	
Warranty	2-year limited warranty (Extended care packages available)	

* Technical Specifications are subject to change without notice.


* Operating (water) temperature absolute maximum 55°C (131°F). Instrument performance reduced when operating outside recommended operating range. Contact Real Tech to verify application.

** Weight does not include cable. Cable weight: 0.70kg (1.55lb).


DIMENSIONS

The TOC probe is a submersible instrument installed directly in-situ using a pole mounting kit or chain mount.

DIMENSIONS FOR TOC PROBE

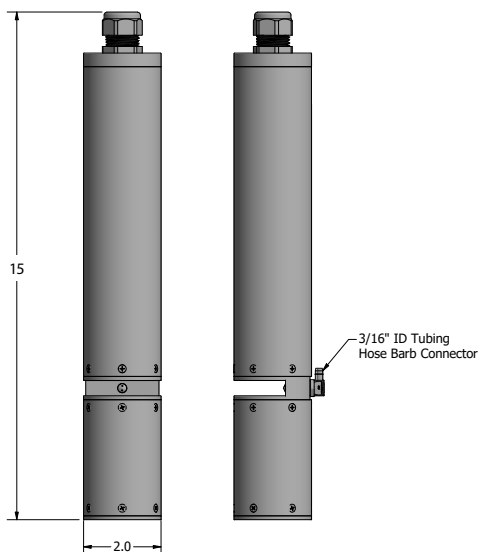

MOUNTING FOR TOC PROBE

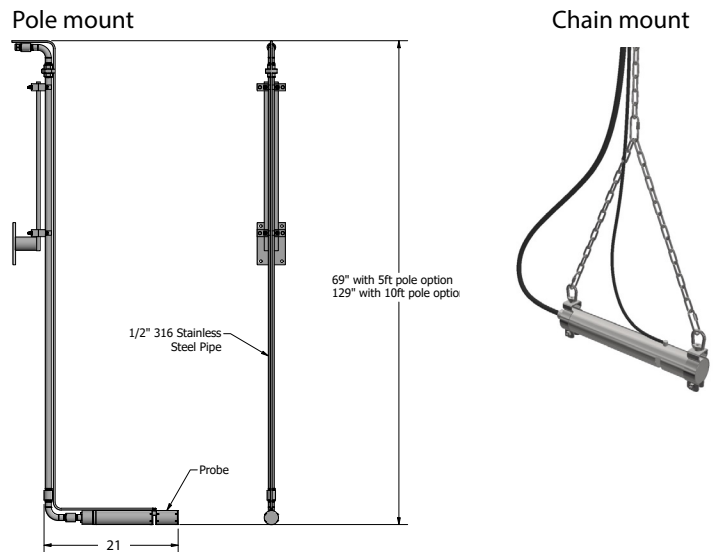

PROBE MODELS & RANGE

Includes titanium (-X) or stainless steel (-S) TOC probe sensor and 35 feet of communication cable. Controller, mounting kit and cleaning system sold separately.

Measurement ranges are estimations based on previous field data, and may vary based on plant specific details. Full measurement range may be greater than the ranges stated in the table below, although accuracy may be significantly reduced outside these stated ranges.

Please contact Real Tech for your application specific demands.

MUNICIPAL

MODEL#	PATH LENGTH	TOC / DOC (mg/L)
OA-X2005 / OA-S2005	0.5 mm	0 - 3500
OA-X2010 / OA-S2010	1 mm	0 - 1750
OA-X2020 / OA-S2020	2 mm	0 - 875
OA-X2040 / OA-S2040	4 mm	0 - 440
OA-X2100 / OA-S2100	10 mm	0 - 175

DAIRY

MODEL#	PATH LENGTH	TOC / DOC (mg/L)
OA-X2005 / OA-S2005	0.5 mm	0 - 12,500
OA-X2010 / OA-S2010	1 mm	0 - 6250
OA-X2020 / OA-S2020	2 mm	0 - 3125
OA-X2040 / OA-S2040	4 mm	0 - 1560
OA-X2100 / OA-S2100	10 mm	0 - 625

BEVERAGE

MODEL#	PATH LENGTH	TOC / DOC (mg/L)
OA-X2005 / OA-S2005	0.5 mm	0 - 12,000
OA-X2010 / OA-S2010	1 mm	0 - 6000
OA-X2020 / OA-S2020	2 mm	0 - 3000
OA-X2040 / OA-S2040	4 mm	0 - 1500
OA-X2100 / OA-S2100	10 mm	0 - 600

BREWERY

MODEL#	PATH LENGTH	TOC / DOC (mg/L)
OA-X2005 / OA-S2005	0.5 mm	0 - 12,000
OA-X2010 / OA-S2010	1 mm	0 - 6000
OA-X2020 / OA-S2020	2 mm	0 - 3000
OA-X2040 / OA-S2040	4 mm	0 - 1500
OA-X2100 / OA-S2100	10 mm	0 - 600

MEAT PROCESSING

MODEL#	PATH LENGTH	TOC / DOC (mg/L)
OA-X2005 / OA-S2005	0.5 mm	0 - 5000
OA-X2010 / OA-S2010	1 mm	0 - 2500
OA-X2020 / OA-S2020	2 mm	0 - 1250
OA-X2040 / OA-S2040	4 mm	0 - 625
OA-X2100 / OA-S2100	10 mm	0 - 250

PULP & PAPER

MODEL#	PATH LENGTH	TOC / DOC (mg/L)
OA-X2005 / OA-S2005	0.5 mm	0 - 1000
OA-X2010 / OA-S2010	1 mm	0 - 500
OA-X2020 / OA-S2020	2 mm	0 - 250
OA-X2040 / OA-S2040	4 mm	0 - 125
OA-X2100 / OA-S2100	10 mm	0 - 50

* Stated ranges are approximate, dependent on industry, site and application - contact Real Tech to confirm model selection

CONTROLLERS

Controllers include proprietary inputs for Real Tech sensors and accessories.

PRODUCT #	NAME	DESCRIPTION
S--229005	Real Controller Lite	Wall mounted controller with 4-line x 20-character back lit LCD display. Includes modbus RTU (RS485)
S-169000	Real Controller	Wall mounted controller with 4-line x 20-character back lit LCD display. Includes modbus RTU (RS485), 1 channel of 4-20 mA out and digital I/O module
S-11TPC	Real Controller Pro	Wall mounted controller with 12.1" colour LCD touch panel PC interface (PC inside cabinet model). Includes Modbus TCP
S-11TPCD	Real Controller Pro	Wall mounted controller with 12.1" colour LCD touch panel PC interface (PC external on door model). Includes Modbus TCP

ACCESSORIES

PRODUCT #	NAME	DESCRIPTION
S-228070	Probe Clean System	Cleaning valve module requires on-site compressed air or pressured water for automatic probe cleaning
S-228080	Compressed Air System	Compressor for air cleaning when compressed air not available on-site
S-219081	Probe Mounting Kit I	Provides secure mounting attachment for titanium or stainless steel probe to a tank wall or open channel wall. No pole included.
S-219082	Probe Mounting Kit II	Provides secure mounting attachment for titanium or stainless steel probe to a tank wall or open channel wall. 5' pole included.
S-219083	Probe Mounting Kit III	Provides secure mounting attachment for titanium or stainless steel probe to a tank wall or open channel wall. 10' pole included.
S-229085	Chain Mount	Stainless steel chain for mounting probe in open channel

Real Tech Inc.

1150 Champlain Court,
Whitby, Ontario L1N 6K9 Canada
TF: 1.877.779.2888 T: 1.905.665.6888
info@realtechwater.com

REALTECH
INC.